

UNIQUE SELLING PROPOSITION



Distinctive design & solid appearance



Quiet operating system & easy maintenance



Energy efficient system & environmentally safe refrigerant



Powerful & consistent cooling performance

HIGHLIGHT & FEATURES

CREATION : QUALITY ASSURANCE


- ◆ High-quality austenitic stainless steel
- ◆ Adjustable PVC coated steel shelves
- ◆ Solid magnetic gaskets for a tight seal
- ◆ Environment safe HCFC refrigerant
- ◆ Optimum size for space constraint kitchen
- ◆ Complies to global safety standards & regulation

ENERGY SAVING SYSTEM : ONE-TIME INVESTMENT

- ◆ Effective defrost system
- ◆ Excellent cooling performance that guarantees cost saving with long term usage
- ◆ HI-Low Temperature and Defrost alarm
- ◆ Easy plug-in of 13 Amp power supply (240V/50Hz/1 phase)
- ◆ High density PU for the perfect insulation

ASSURANCE : HYGIENE AND SAFETY

- ◆ Complies with global sanitary & food grade standards
- ◆ Ensure food freshness and avoid contamination

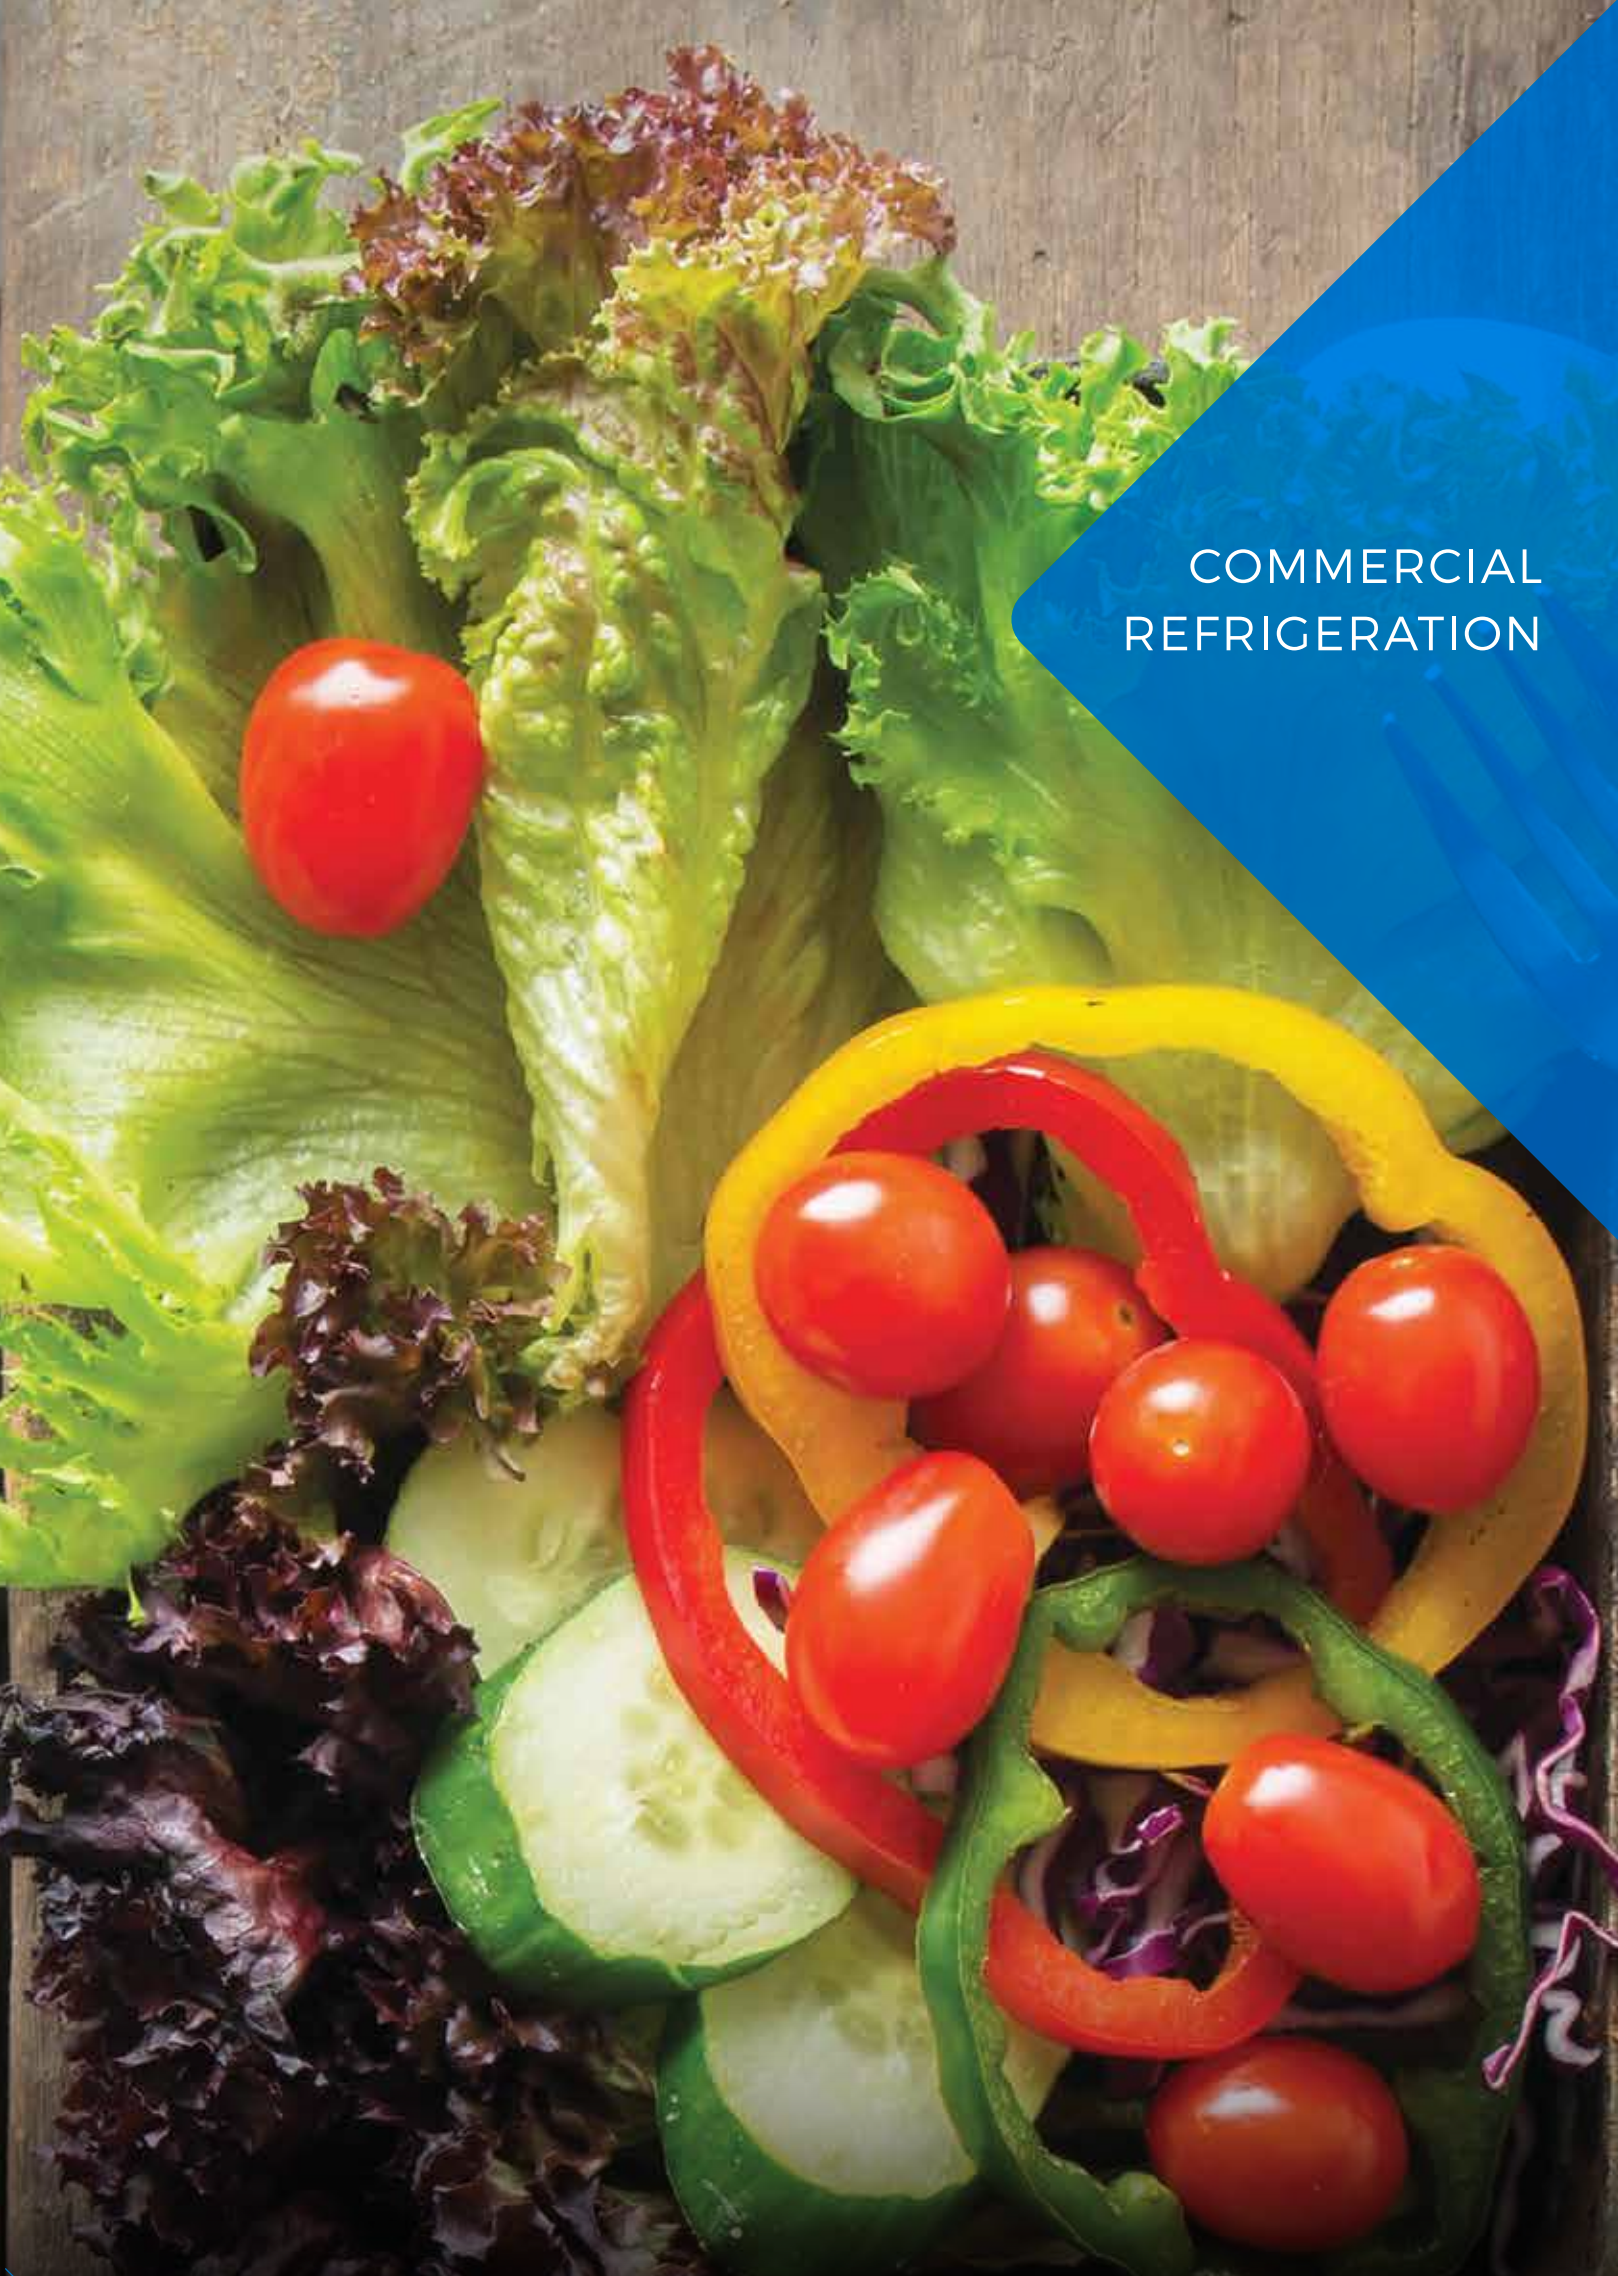

COMMERCIAL
REFRIGERATION



REFRIGERATION

UPRIGHT SOLID DOOR

NEW! Pass Through Upright Refrigerator



1260 x 800 x 1830 width | depth | height (mm)

MLP-1043R	
Weight	180kg
Capacity	1045L
Temp Range	0°C to +7°C
No of Shelves	8
Refrigerant	R-134A
Compressor (hp)	1/3
Voltage	220 - 240V / 50 & 60Hz

UPRIGHT SOLID DOOR 2-Door



640 x 800 x 1830 width | depth | height (mm)

	MDS-520R1	MDS-520F1
Weight	110kg	110kg
Capacity	508L	508L
Temp Range	0°C to +7°C	-24°C to -3°C
No of Shelves	4	4
Refrigerant	R-134A	R-134A
Compressor (hp)	1/3	1/3
Voltage	220 - 240V / 50 & 60Hz	
Rated input (A/W)	2.1 / 330	1.5 / 240

MDS-520R1

MDS-520F1

F FREEZER
C CHILLER

Self Diagnosis

S.Steel Interior/Exterior

Micom Auto.Thermostat

Auto Defrost System



UPRIGHT SOLID DOOR 4-Door



MDS-1040R1

F FREEZER
C CHILLER

1260 X 800 X 1830 width | depth | height (mm)

	MDS-1040R1	MDS-1040F1	MDS-1040HRF1	MDS-1040RF1
Weight	180kg	180kg	180kg	180kg
Capacity	1045L	1045L	502L(C) + 502L(F)	782L(C) + 222L(F)
Temp Range	0°C to +7°C	-24°C to -3°C	-24°C to -3°C 0°C to +7°C	-24°C to -3°C 0°C to +7°C
No of Shelves	8	8	8	8
Refrigerant	R-134A	R-134A	R-134A	R-134A
Voltage	220 - 240V / 50 & 60Hz			
Rated input (A/W)	1.9 / 300	2.9 / 450	3.5 / 550	3.5 / 550



MDS-1040F1



MDS-1040HRF1



MDS-1040RF1

UPRIGHT SOLID DOOR 6-Door



MDS-1660R1

1900 X 800 X 1830 width | depth | height (mm)

	MDS-1660R1	MDS-1660F1	MDS-1660RF1
Weight	240kg	240kg	240kg
Capacity	1644L	1644L	492L(F) + 1107L(C)
Temp Range	0°C to +7°C	-24°C to -3°C	-24°C to -3°C 0°C to +7°C
No of Shelves	12	12	12
Refrigerant	R-134A	R-134A	R-134A
Voltage	220 - 240V / 50 & 60Hz		
Rated input (A/W)	3.8 / 600	4.1 / 640	-



MDS-1660F1



MDS-1660RF1

F FREEZER
C CHILLER

Self Diagnosis

S.Steel Interior/Exterior

Micom Auto.Thermostat

Auto Defrost System



REFRIGERATION

European Style (Gastronorm)

1. Made to fit oven pans.

- Universal pan size (GN 2/1: 650mm x 530mm)
- Easily use the same pans for oven cooking in the refrigerator.




2. Made for pan and conventional shelf usage.

- Universal pan size (GN 2/1: 650mm x 530mm)
- Compatible with gastronorm pan and common shelf sizes.



3. Adjustable pan guard.

- Place pan on any levels as needed.
- Highly stackable configuration.
- Customizable storage space.





DELUXE TOP MOUNT SOLID DOOR GN (European Type)



MDRT-771E / MDFT-771E

MDRT-1471E / MDFT-1471E

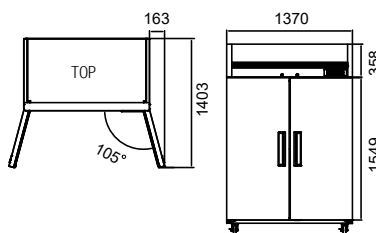

* 128 mm (5 inch) caster included

Model		MDRT-771E	MDFT-771E	MDRT-1471E	MDFT-1471E
		Refrigerator	❄️ Freezer	Refrigerator	❄️ Freezer
Capacity	liter	620		1270	
	cu. ft.	22		45	
Exterior Dimension (W x D x H)	mm	681 x 787 x 2092*		1370 x 787 x 2092*	
	inch	26.8 x 31 x 82.4*		54 x 31 x 82.4*	
Packing Dimension (W x D x H)	mm	720 x 825 x 2104		1410 x 825 x 2104	
	inch	28.3 x 32.5 x 82.8		55.5 x 32.5 x 82.8	
Net Weight	kg	106	112	158	173
	lb	236	249	351	384
Gross Weight	kg	120	124	176	190
	lb	267	276	391	422
No. of Casters		4		4	
No. of Shelves		4		8	
Door		1 Swing Door		2 Swing Doors	
Pan Guide		6 EA		12 EA	
Pan		3 (2/1 Size)		6 (2/1 Size)	
Compressor (hp)		1/3	1/2	1/3	3/4
Refrigerant		R-134A	R-404A	R-134A	R-404A
Range of Temperature		0~7 °C / 28~39 °F	-24~-3 °C / -9~5 °F	0~7 °C / 28~39 °F	-24~-3 °C / -9~5 °F
Voltage / Frequency		115 V / 60 Hz 220~240 V / 50 & 60 Hz		115 V / 60 Hz 220~240 V / 50 & 60 Hz	
Rated Input (A/W, 220~240V 50Hz)		2.2 / 350	3.5 / 547	2.5 / 391	5.3 / 825
Defrosting		Auto		Auto	
Certification		CE		CE	




DELUXE TOP MOUNT GLASS DOOR



MDRT-771G / MDFT-771G

MDRT-1471G / MDFT-1471G

MDRT-72TG

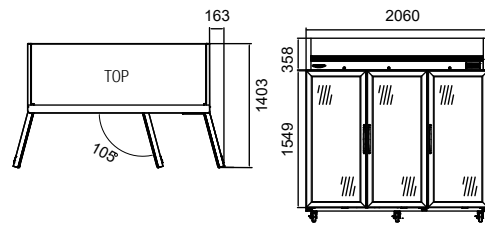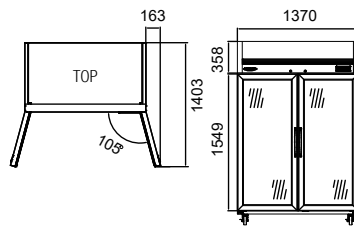

* 128 mm (5 inch) caster included

Model	MDRT-771G		MDFT-771G		MDRT-1471G		MDFT-1471G		MDRT-1471G		
	Refrigerator		❄ Freezer		Refrigerator		❄ Freezer		Refrigerator		
Capacity	liter	620				1270				1950	
	cu. ft.	22				45				69	
Exterior Dimension (W x D x H)	mm	681 x 787 x 2092*				1370 x 787 x 2092*				2060 x 787 x 2092*	
	inch	26.8 x 31 x 82.4*				54 x 31 x 82.4*				81 x 31 x 82.4*	
Packing Dimension (W x D x H)	mm	720 x 865 x 2104				1410 x 865 x 2104				2100 x 865 x 2104	
	inch	28.3 x 34 x 82.8				55.5 x 34 x 82.8				82.6 x 34 x 82.8	
Net Weight	kg	110	116	166	181	240					
	lb	244	258	369	402	533					
Gross Weight	kg	124	128	184	198	269					
	lb	276	284	409	440	598					
No. of Casters	4				4				6		
No. of Shelves	4				8				12		
Door	1 Swing Door				2 Swing Doors				3 Swing Doors		
Compressor (hp)	1/3		1/2		3/4		1		3/4		
Refrigerant	R-134A		R-404A		R-404A				R-404A		
Range of Temperature	0~7 °C / 28~39 °F		-24~-3 °C / -9~5 °F		0~7 °C / 28~39 °F		-24~-3 °C / -9~5 °F		0~7 °C / 28~39 °F		
Voltage / Frequency	115 V / 60 Hz 220~240 V / 50 & 60 Hz				115 V / 60 Hz 220~240 V / 50 & 60 Hz				115 V / 60 Hz 220~240 V / 50 & 60 Hz		
Rated Input (AW, 220~240V 50Hz)	4.1 / 650		5.4 / 850		7.4 / 1160		9.5 / 1500		10.2 / 1600		
Defrosting	Auto				Auto				Auto		
Certification	Safety - UL CE				Safety - UL CE				Safety - UL CE		

Specifications & designs are subject to change without prior notice



DISPLAY CHILLER / FREEZER



MGR-420 / MGF-420

Features

- ◆ White PCM exterior and white prepainted aluminium exterior.
- ◆ Double layer glass with tempered surface.
- ◆ Bottom wire tube and fan-assisted condensing.
- ◆ Adjustable shelves.
- ◆ Efficient refrigeration system.
- ◆ High-density polyurethane insulation

	MGR-420	MGF-420
Size (WxDxH)	650 x 590 x 1850	670 x 690 x 1952
Packing Dimension	670 x 630 x 1860	690 x 730 x 1962
Net Capacity (L)	196	280
Compressor	1/4	1/2
Temperature (C)	0~ +10	-18~ + 10
Refrigerant	R-134a	R-134a
Defrosting	Natural	Auto
Shelf	4	4
Capacity (Liters)	420	420
Door	1 Swing Door	1 Swing Door



BEVERAGE COOLER



GD-P430WA

Features

- ◆ White PCM exterior and white prepainted aluminium exterior.
- ◆ Double layer glass with tempered surface.
- ◆ Bottom wire tube and fan-assisted condensing.
- ◆ Adjustable shelves.
- ◆ Black plastic door frame.
- ◆ Vertical interior light.



GD-P1000WB-A

	GD-P430WA	GD-P1000WB-A
Size (LxDxH)	578 x 605 x 1980	1130 x 720 x 2023
Packing Dimension	624 x 630 x 2025	1180 x 770 x 2100
Net Capacity (L)	338	1000
Cooling Systems	Fan Direct Cooling	Fan Cooling
Temperature (C)	0~ +10	0~ +10
Coolant	R600a	R290a/R134a
Thermostat	Mechanical	Digital
Shelf	4	8
Loading quantity	27/57/75	15/30/30
Door	-	Hinged



REFRIGERATION

COUNTER REFRIGERATION

CHILLER & FREEZER



Manufactured with high-quality austenitic stainless steel & insulation for an excellent cooling performance that guarantees high cost saving with long term usage.




- ◆ Available in 900mm | 1200mm | 1500mm | 1800mm
- ◆ Depth Option :600mm & 760mm
- ◆ Pizza preparation table, Drawer type, Food pan insert and many more.

SPECIAL SIZE :



Certified For Efficient Standards & Quality

Complies with global sanitary & food safety standards.



Convenient Handle Design

Fully open door frame for a firm grip.



Micom Automatic Thermostat

Computerized thermometer & temperature controller with a digital display built-in.



Easy Maintenance

Easy access to condensing unit for easy maintenance.



Adjustable Shelf

PVC Coated Shelf which can withstand up to 50kg of load. Suitable for full GN 1/1 Pan



Retractable Door Hinge

Closes door automatically and ensure tight seal.

COUNTER REFRIGERATION



900 x 600 x 850 ♦ 900 x 760 x 850 width | depth | height (mm)

	MDRT-1D6-900	MDRT-1D7-900
Capacity	138L	190L
Temp Range	2°C to +8°C	
Refrigerant	R-134A	
Voltage	220-240V / 50Hz	

	MDFT-1D6-900	MDFT-1D7-900
Capacity	138L	190L
Temp Range	-20°C to -10°C	
Refrigerant	R-404a	
Voltage	220-240V / 50Hz	



1200 x 600 x 850 ♦ 1200 x 760 x 850 width | depth | height (mm)

	MDRT-2D6-1200	MDRT-2D7-1200
Capacity	216L	298L
Temp Range	2°C to +8°C	
Refrigerant	R-134A	
Voltage	220-240V / 50Hz	

	MDFT-2D6-1200	MDFT-2D7-1200
Capacity	216L	298L
Temp Range	-20°C to -10°C	
Refrigerant	R-404a	
Voltage	220-240V / 50Hz	



1500 x 600 x 850 ♦ 1500 x 760 x 850 width | depth | height (mm)

	MDRT-2D6-1500	MDRT-2D7-1500
Capacity	294L	405L
Temp Range	2°C to +8°C	
Refrigerant	R-134A	
Voltage	220-240V / 50Hz	

	MDFT-2D6-1500	MDFT-2D7-1500
Capacity	294L	405L
Temp Range	-20°C to -10°C	
Refrigerant	R-404a	
Voltage	220-240V / 50Hz	



REFRIGERATION

COUNTER REFRIGERATION



1800 x 600 x 850 ♦ 1800 x 760 x 850 width | depth | height (mm)

MDRT-3D6-1800

Capacity	373L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-3D6-1800

Capacity	373L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz

MDRT-3D7-1800

Capacity	513L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-3D7-1800

Capacity	513L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 600 x 850 ♦ 1800 x 760 x 850 width | depth | height (mm)

MDRT-2D6-1800

Capacity	373L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-2D6-1800

Capacity	373L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz

MDRT-2D7-1800

Capacity	513L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-2D7-1800

Capacity	513L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



◆ DRAWER COUNTER CHILLER / FREEZER



1200 x 760 x 850 width | depth | height (mm)

MDRT-4W7-1200

Weight	90kg
Capacity	108L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-4W7-1200

Weight	90kg
Capacity	108L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1500 x 760 x 850 width | depth | height (mm)

MDRT-4W7-1500

Weight	105kg
Capacity	132L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-4W7-1500

Weight	105kg
Capacity	132L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 760 x 850 width | depth | height (mm)

MDRT-6W7-1800

Weight	121kg
Capacity	162L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDFT-6W7-1800

Weight	121kg
Capacity	162L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



REFRIGERATION

GLASS DOOR COUNTER CHILLER



900 x 600 x 850 ♦ 900 x 760 x 850 width | depth | height (mm)

MGRT-1D6-900	
Weight	73kg
Capacity	160L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MGRT-1D7-900	
Weight	78kg
Capacity	181L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1200 x 600 x 850 ♦ 1200 x 760 x 850 width | depth | height (mm)

MGRT-2D6-1200	
Weight	85kg
Capacity	270L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MGRT-2D7-1200	
Weight	90kg
Capacity	290L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1500 x 600 x 850 ♦ 1500 x 760 x 850 width | depth | height (mm)

MGRT-2D6-1500	
Weight	100kg
Capacity	379L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MGRT-2D7-1500	
Weight	105kg
Capacity	399L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1800 x 600 x 850 ♦ 1800 x 760 x 850 width | depth | height (mm)

MGRT-3D6-1800	
Weight	116kg
Capacity	488L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MGRT-3D7-1800	
Weight	121kg
Capacity	508L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



◆ SALAD TABLE CHILLER



900 x 600 x 850 ◆ 900 x 760 x 850 width | depth | height (mm)

MDST-1D6-900	
Weight	73kg
Capacity	160L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-1D7-900	
Weight	78kg
Capacity	181L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1200 x 600 x 850 ◆ 1200 x 760 x 850 width | depth | height (mm)

MDST-2D6-1200	
Weight	85kg
Capacity	270L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-2D7-1200	
Weight	90kg
Capacity	290L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1500 x 600 x 850 ◆ 1500 x 760 x 850 width | depth | height (mm)

MDST-2D6-1500	
Weight	100kg
Capacity	379L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-2D7-1500	
Weight	105kg
Capacity	399L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1800 x 600 x 850 ◆ 1800 x 760 x 850 width | depth | height (mm)

MDST-3D6-1800	
Weight	116kg
Capacity	488L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-3D7-1800	
Weight	121kg
Capacity	508L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



REFRIGERATION

PASS-THRU COUNTER CHILLER / FREEZER



1200 x 835 x 850 width | depth | height (mm)

MPRT-4D7-1200

Weight	90kg
Capacity	290L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MPFT-4D7-1200

Weight	90kg
Capacity	290L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1500 x 835 x 850 width | depth | height (mm)

MPRT-4D7-1500

Weight	105kg
Capacity	399L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MPFT-4D7-1500

Weight	105kg
Capacity	399L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 835 x 850 width | depth | height (mm)

MPRT-6D7-1800

Weight	121kg
Capacity	508L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MPFT-6D7-1800

Weight	121kg
Capacity	508L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



CHEF BASE COUNTER CHILLER / FREEZER



1200 x 760 x 600 width | depth | height (mm)

MBRT-4W7-1200	
Weight	100kg
Capacity	64L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MBFT-4W7-1200	
Weight	101kg
Capacity	64L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1500 x 760 x 600 width | depth | height (mm)

MBRT-4W7-1500	
Weight	114kg
Capacity	80L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MBFT-4W7-1500	
Weight	115kg
Capacity	80L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 760 x 600 width | depth | height (mm)

MBRT-6W7-1800	
Weight	120kg
Capacity	96L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MBFT-6W7-1800	
Weight	121kg
Capacity	96L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz


MODELUX
designed by Lassele **PLUS**

INTRODUCING NEW ICE MAKERS
FROM KOREA



Specifications & designs are subject to change without prior notice

Modular Ice Maker



Air Filter

Easily detachable and cleanable air filter extends product life and reduces maintenance cost.



PCB Display

Users can check every step and error code at a glance. Engineers can easily figure out the problem without visiting the site.



Stainless Steel Evaporator

Long lasting durable stainless steel evaporator produces firm and clear ice.



Firm Leg

Height adjustable and firm leg supports the product.



Front & Side Air Circulation

Side air circulation prevents heat from directly touching users.



Undercounter Ice Maker



MODULAR ICE MAKER



		MDIM-300A	MDIM-500A	MDIM-650A	MDIM-900A
Exterior Dimension (W x D x H)	mm	564 x 696 x 778	564 x 696 x 778	564 x 676 x 958	766 x 676 x 958
	inch	22.2 x 27.4 x 30.6	22.2 x 27.4 x 30.6	22 x 27 3/8 x 37 3/4	30 x 27 3/8 x 37 3/4
Packing Dimension (W x D x H)	mm	680 x 790 x 924	680 x 790 x 924	660 x 800 x 1140	860 x 800 x 1140
	inch	27 x 31 x 36	27 x 31 x 36	26 x 31 1/2 x 44 7/8	33 8/7 x 31 1/2 x 44 7/8
Net Weight	kg	60	62	73	81
	lb	133	138	161	178
Gross Weight	kg	75	78	90	97
	lb	167	173	198	213
Ice Production / day	kg	136	227	329kg* / 287kg**	389kg* / 325kg**
	lb	300	500	726lb* / 633lb**	858lb* / 717lb**
Ice Size	mm	38 x 28 x 13	38 x 28 x 13	38 x 28 x 13	38 x 28 x 13
	inch	1.5 x 1.1 x 0.5	1.5 x 1.1 x 0.5	3/2 " x 9/8 " x 1/2"	3/2 " x 9/8 " x 1/2"
Ice Shape		crescent	crescent	crescent	crescent
Condenser		air-cooled	air-cooled	air-cooled	air-cooled
Compressor (hp)		1/2	3/4	1	1.5
Refrigerant		R-404a	R-404a	R-410A	R-410A
Voltage / Frequency		220~240 V / 50 & 60Hz	220~240 V / 50 & 60Hz	220~240 V / 50 & 60Hz	220~240 V / 50 & 60Hz
Ampere		6.0A	7.0A	6.0 A	9.0 A
Electricity Consumption / Day		15.9 kWh	24.5 kWh	25.8 kWh	39.4 kWh
Certification		Safety - UL Sanitation - ETL CE	Safety - UL Sanitation - ETL CE	Safety - UL Sanitation - ETL Energy Star	Safety - UL Sanitation - ETL

STORAGE BIN

* 153 mm (6 inch leg included)



		MDIB-300S	MDIB-500S
Exterior Dimension (W x D x H)	mm	560 x 825 x 1174	762 x 825 x 1174
	inch	22 x 32.5 x 46.2	30 x 32.5 x 46.2
Packing Dimension (W x D x H)	mm	610 x 920 x 1155	860 x 920 x 1155
	inch	24 x 36.2 x 4.5	34 x 36.2 x 47.2
Net Weight	kg	34	42
	lb	75	93
Gross Weight	kg	47	69
	lb	103.5	152
Ice Storage	kg	118	167
	lb	260	370

*Ambient temperature 21°C(70°F) Water temperature 10°C(50°F)

**Ambient temperature 32°C(90°F) Water temperature 21°C(70°F) - Energy star standard

◇ UNDERCOUNTER ICE MAKER

* 153 mm (6 inch leg included)



MDIU-60A / MDIU-100A / MDIU-150A



MDIU-250A

		MDIU-60A	MDIU-100A	MDIU-150A	MDIU-250A
Exterior Dimension (W x D x H)	mm	500 x 600 x 810	500 x 600 x 810	635 x 708 x 975	773 x 763 x 978
	inch	19 11/16 x 23 5/8 x 31 7/8	19 11/16 x 23 5/8 x 31 7/8	25 x 27.9 x 38.3	30.4 x 30 x 38.5
Packing Dimension (W x D x H)	mm	560 x 690 x 972	560 x 690 x 972	720 x 790 x 995	880 x 830 x 995
	inch	22 x 27 3/16 x 38 1/4	22 x 27 3/16 x 38 1/4	28 x 31 x 39	35 x 33 x 39
Net Weight	kg	49	49	56	66
	lb	108	108	123	147
Gross Weight	kg	57.5	57.5	71	86
	lb	126	126	158	191
Ice Production / day	kg	41kg* / 30kg**	44kg* / 34kg**	68	113
	lb	91lb* / 67lb**	98lb* / 75lb**	150	250
Ice Storage	mm	25	25	30	42
	inch	55	55	66	96
Ice Size	mm	38 x 28 x13	38 x 28 x13	38 x 28 x13	38 x 28 x13
	inch	3/2 x 9/8 x 1/2	3/2 x 9/8 x 1/2	1.5 x 1.1 x 0.5	1.5 x 1.1 x 0.5
Ice Shape		crescent	crescent	crescent	crescent
Condenser		air-cooled	air-cooled	air-cooled	air-cooled
No. of Legs		4	4	4	4
Compressor (hp)		1/3	1/2	1/3	1/2
Refrigerant		R-134a	R-134a	R-134a	R-404a
Voltage / Frequency		220-240 V / 50 & 60Hz	220-240 V / 50 & 60Hz	220-240 V / 50 & 60Hz	220-240 V / 50 & 60Hz
Ampere		2.0 A	2.5 A	4.0A	5.0A
Electricity Consumption / Day		5.5 kWh	7.1 kWh	10.2 kWh	15.5 kWh
Certification		-	-	Safety - ETL Sanitation - ETL Energy Star CE (230 V / 50Hz)	Safety - UL Sanitation - ETL CE

*Ambient temperature 21°C(70°F) Water temperature 10°C(50°F)

**Ambient temperature 32°C(90°F) Water temperature 21°C(70°F) - Energy star standard




DISPLAY
SHOWCASE




COMBI SHOWCASE




TOP



BACK



FRONT



SIDE



	MSBC-1500RD	MSBC-1800RD
Classification	Refrigerator	
Cabinet dimension (WxDxH mm)	1500 x 900 x 1500	1800 x 900 x 1500
Capacity (L)	Bakery 106 / Open 260	Bakery 136 / Open 310
Inner Temperature (°C)	Bakery 3~8 / Open 5~10	Bakery 3~8 / Open 5~10
Refrigerant	R-404a	R-404a
Insulation Type	Polyurethane / Cyclopentane + CFC Free	
Amps (A)	6.3	7.6
Voltage (V/Hz/Ph)	220 / 50 / 1	
Weight (Kg)	300	400
Door Type	Sliding door	
Number of Doors	4	4
Compressor (HP)	Bakery 1/2 / Open 1	Bakery 1 / Open 1
Number of Shelves	1	1



Fan cooling



Digital




LED lamp




DISPLAY SHOWCASE

OPEN CASE

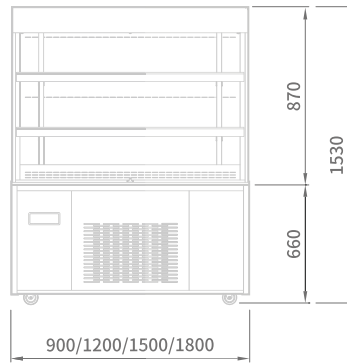

FRONT

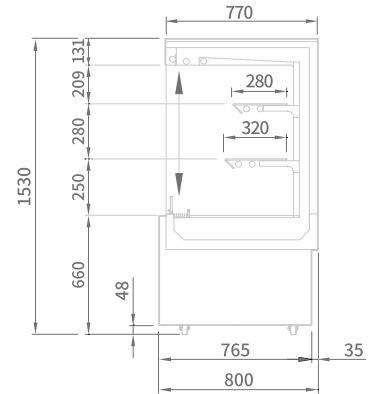

SIDE

* Notes on Use

Open showcase must be placed where the surrounding environment is no greater than +25°C, the wind speed is no greater than 0.3 meter/sec and the humidity level is no greater than 60%.

	MSOA-900	MSOA-1200	MSOA-1500	MSOA-1800
Classification	Refrigerator			
Cabinet dimension (WxDxH mm)	900 x 800 x 1530	1200 x 800 x 1530	1500 x 800 x 1530	1800 x 800 x 1530
Capacity (L)	430	510	600	670
Inner Temperature (°C)	5 ~ 10			
Refrigerant	R - 404a			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Amps (A)	3.8	4.5	4.9	5.5
Voltage (V/Hz/Ph)	220 / 50 / 1			
Weight (Kg)	190	240	270	310
Compressor (HP)	1	1	1	1+
Number of Shelves	2	2	2	2



Fan cooling




Digital




LED lamp



SANDWICH CASE

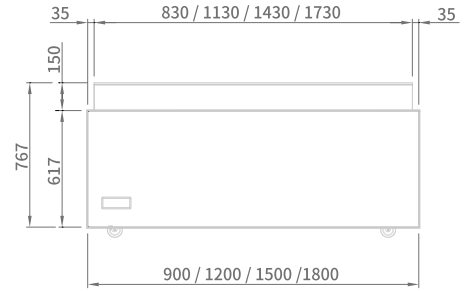

FRONT



SIDE

	MSOS-900	MSOS-1200	MSOS-1500	MSOS-1800
Classification	Refrigerator			
Cabinet dimension (WxDxH mm)	900 x 900 x 838	1200 x 900 x 838	1500 x 900 x 838	1800 x 900 x 838
Capacity (L)	112	150	182	204
Inner Temperature (°C)	5 ~ 10			
Refrigerant	R - 404a			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Amps (A)	3.8	4.5	4.9	5.5
Voltage (V/Hz/Ph)	220 / 50 / 1			
Weight (Kg)	140	170	200	230
Compressor (HP)	1/2	1	1	1



Fan cooling



Digital




LED lamp



DISPLAY SHOWCASE

CHOCOLATE CASE

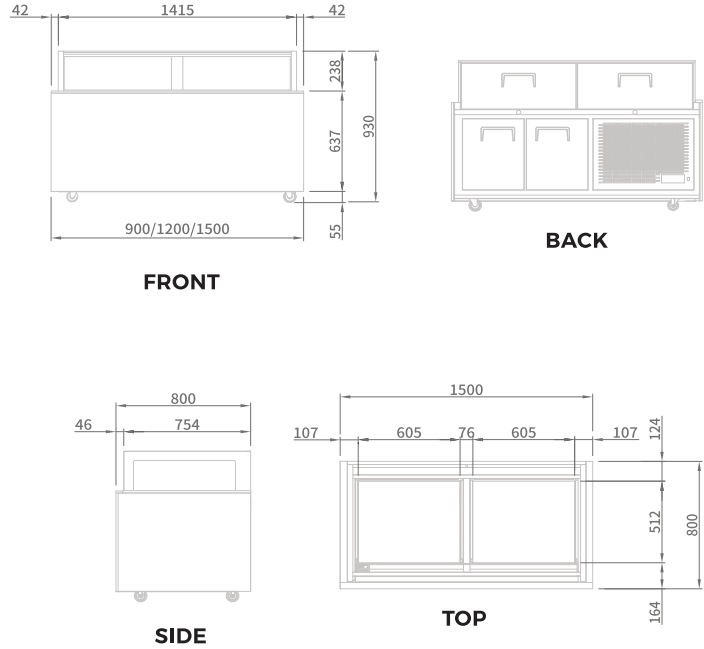

	MSCD-900D	MSCD-1200D	MSCD-1500D
Classification	Refrigerator		
Cabinet dimension (WxDxH mm)	900 x 800 x 930	1200 x 800 x 930	1500 x 800 x 930
Capacity (L)	85	108	130
Inner Temperature (°C)	10 ~ 14 Humidity 50 ±5%		
Refrigerant	R - 134a		
Insulation Type	Polyurethane / Cyclopentane + CFC Free		
Amps (A)	2.1	2.5	3
Voltage (V/Hz/Ph)	220 / 50 / 1		
Weight (Kg)	160	190	240
Door Type	Drawer / Door		
Number of Drawer	1	2	2
Number of Doors	1	3	4
Compressor (HP)	1/3	1/3	1/3



Fan cooling



Digital



LED lamp

A close-up photograph of several skewers of grilled food, including chunks of meat and green vegetables, cooking over a bright orange and yellow flame. The skewers are positioned horizontally across the lower half of the frame. The background is dark and out of focus, emphasizing the fire and the food. An orange and yellow gradient shape is overlaid on the right side of the image, containing the text.

COOKING
EQUIPMENT



COOKING EQUIPMENT

OPEN BURNER



MSM 4-OB

- ◆ Heavy-duty cast iron grates
- ◆ LPG burner
- ◆ Removable drip tray for easy cleaning
- ◆ Burner fitted with pilot flame
- ◆ Equipped with piezzo ignition
- ◆ Optional for stand
- ◆ Gas oven with GN 2/1 dimensions, manufactured with well-insulated & rugged door, mounted on self-balancing spring loaded hinges.
- ◆ Oven temperature adjustable from 100°C to 300°C with 8 variable settings Equipped with piezzo ignition.



MSM 6-OB

	MSM 2-OB	MSM 4-OB	MSM 6-OB
Dimension (WxDxH)mm	305 x 760 x 350	610 x 760 x 350	915 x 760 x 350
Packed Size (WxDxH)mm	378 x 820 x 420	670 x 820 x 420	975 x 820 x 420
Estimate Weight (Kg)	33	55	77
Nominal Consumption (mm BTU)	30,000	60,000	90,000
Gas Pressure	5 psi	5 psi	5 psi
No. of Burners	2 nos.	4 nos.	6 nos.
Ignition	Manual	Manual	Manual

- Available in stand MSM 2-OB(S), MSM 4-OB(S), MSM 6-OB(S)



MSM 4-OV

	MSM 4-OV	MSM 6-OV
Dimension (WxDxH)mm	700 x 760 x 850	1060 x 760 x 850
Packed Size (WxDxH)mm	760 x 820 x 960	1120 x 820 x 960
Estimate Weight (Kg)	145	181
Nominal Consumption (mm BTU)	84,000 / 27,000 (Oven)	126,000 / 27,000 (Oven)
Gas Pressure	5 psi	5 psi
No. of Burners	4 nos. / 1 nos. (Oven)	6 nos. / 1 nos. (Oven)
Ignition	100°C ~ 300°C	100°C ~ 300°C



MSM 6-OV

◆ STOCK POT



- ◆ Stainless steel body
- ◆ Cast iron top grate
- ◆ 4 adjustable legs
- ◆ Real gas connection
- ◆ Available in either single or double burner models

	SP-100	SP-200
Dimension (WxDxH)mm	600 x 600 x 540	1200 x 600 x 540
Packed Size (WxDxH)mm	655 x 750 x 600	1220 x 750 x 600
Estimate Weight (Kg)	37	68
Gas Consumption (mm BTU)	60,000	120,000
Gas Pressure	5 psi	5 psi
Burner Type (LPG)	PF2 burner x 1	PF2 burner x 2

◆ HOT PLATE GRIDDLE



- ◆ Available in LPG or electric version
- ◆ Removable drip tray for easy cleaning
- ◆ Burners fitted with pilot flame
- ◆ Equipped with piezzo ignition
- ◆ Optional for stand

	HP-3000	HP-6000	HP-1003	HP-1004
Dimension (WxDxH)mm	330 x 440 x 290	600 x 440 x 290	610 x 760 x 350	915 x 760 x 350
Packed Size (WxDxH)mm	340 x 476 x 320	640 x 476 x 320	670 x 820 x 470	975 x 820 x 470
Estimate Weight (Kg)	21	31.2	78	102
Nominal Consumption	3 KW	3 KW	38,000 mm BTU	57,000 mm BTU
Rating	240V 50Hz 13A	240V 50Hz 13A	-	-
Gas Pressure	-	-	5 psi	5 psi
No. of Burners	N/A	N/A	2 nos.	2 nos.
Ignition	N/A	N/A	Manual	Manual

- Available in stand HP-1003(S), HP-1004(S)



COOKING EQUIPMENT

CHAR BROILER



MSM 24-CB

- ◆ Heavy-duty cast iron grates
- ◆ LPG burner
- ◆ Removable drip tray for easy cleaning
- ◆ Burner fitted with pilot flame
- ◆ Equipped with piezzo ignition
- ◆ Optional for stand



MSM 36-CBS
(with stand)

	MSM 24-CB	MSM 36-CB
Dimension (WxDxH)mm	610 x 760 x 350	915 x 760 x 350
Packed Size (WxDxH)mm	670 x 820 x 470	975 x 820 x 470
Estimate Weight (Kg)	81	104
Nominal Consumption (mm BTU)	34,000	51,000
Gas Pressure	5 psi	5 psi
No. of Burners	2 nos.	3 nos.
Ignition	Manual	Manual

• Available in stand MSM 24-CB(S), MSM 36-CB(S)

CHAR BROILER C/W HOT PLATE



- ◆ LPG burner
- ◆ Burner fitted with pilot flame
- ◆ Removable drip tray for easy cleaning
- ◆ Equipped with piezzo ignition
- ◆ Single pipe control system

	CBHP-1000
Dimension (WxDxH)mm	700 x 700 x 235
Hot Plate Dimension (WxDxH)mm	270 x 470 x 9
Estimate Weight (Kg)	44.5
Gas Pressure	5 psi
Gas Consumption (mm BTU)	60,000



DEEP FRYER



DFG-4000

	DFG-4000	DFG-8000
Dimension (WxDxH)mm	304 x 454 x 320	600 x 460 x 380
Packed Size (WxDxH)mm	340 x 600 x 450	832 x 532 x 422
Oil Tank Dimension (WxDxH)mm	240 x 300 x 195	240 x 300 x 195 (x2)
Estimate Weight (Kg)	7.2	6.8
Gas Pressure	5 psi	5 psi
Gas Consumption (mm BTU)	10,000	20,000
Heater	N/A	N/A
Rating	N/A	N/A
Capacity	9 Litres	9 Litres x 2
Built in Timer	N/A	N/A



DFT-6000

- ◆ Thermostatic control for maximum energy efficiency
E.G.O thermostat 200°C
- ◆ Comes with durable stainless steel basket
- ◆ Safety features : Built in thermal cut out against overheating
- ◆ International standard compliance to I.E.C
- ◆ Build in timer for electric model
- ◆ Available in single or double tank

	DFT-3000	DFT-6000	DF-3000	DF-6000
Dimension (WxDxH)mm	270 x 430 x 290	515 x 430 x 290	270 x 430 x 290	515 x 430 x 290
Packed Size (WxDxH)mm	320 x 600 x 436	545 x 600 x 436	320 x 600 x 436	545 x 600 x 436
Oil Tank Dimension (WxDxH)mm	300 x 240 x 150	300 x 240 x 150 (x2)	300 x 240 x 150	300 x 240 x 150 (x2)
Estimate Weight (Kg)	8.5	14.3	8.5	14.3
Gas	N/A	N/A	N/A	N/A
Gas Consumption (mm BTU)	N/A	N/A	N/A	N/A
Heater	3 KW	3 KW x 2	3 KW	3 KW x 2
Rating	240V 50Hz 13A	240V 50Hz 13A	240V 50Hz 13A	240V 50Hz 13A
Capacity	5.5 Litres	5.5 Litres x 2	5.5 Litres	5.5 Litres x 2
Built in Timer	Yes 15 min. Max.	Yes 15 min. Max.	-	-



COOKING EQUIPMENT

FOOD WARMER



- ◆ 3 removable & adjustable stainless steel shelves for easy cleaning
- ◆ Heated air water reservoir for humidified environment
- ◆ Front & back sliding panels for self-service

	MSM - 301	MSM - 401
Dimension (WxDxH)mm	560 x 350 x 520	790 x 350 x 520
Packed Size (WxDxH)mm	600 x 435 x 565	830 x 435 x 565
Estimate Weight (Kg)	19.9	25.5
Heater (watt)	750	1000
Rating	240V 50Hz 13A	240V 50Hz 13A
EGO Thermostat	30°C ~ 110°C	30°C ~ 110°C
Lamp	30 Watt	30 Watt

WATER BOILER



- ◆ Fully (seamless) welded tanks for easy cleaning
- ◆ Constructed of highly polished stainless steel 304
- ◆ Suitable for catering service / kiosks / snack bars or any food service operation

	MS - 20(L)	MS - 30(L)	MS - 40(L)	MS - 50(L)
Dimension (mm)	380Ø x 435H	380Ø x 510H	460Ø x 510H	460Ø x 575H
Packed Size (WxDxH)mm	384 x 384 x 464	384 x 384 x 536	463 x 463 x 544	463 x 463 x 604
Estimate Weight (Kg)	4.8	5.3	6.8	7.1
Heater (KW)	3 KW	3 KW	3 KW	3 KW
Rating	240V 50Hz 13A	240V 50Hz 13A	240V 50Hz 13A	240V 50Hz 13A
EGO Thermostat	30°C ~ 110°C	30°C ~ 110°C	30°C ~ 110°C	30°C ~ 110°C

CORN STEAMER



CS-30 (E)

CS-30 (G)

- ◆ It is constructed of highly polished stainless steel 304, fully (seamless) welded tank features with direct access to interior for easy cleaning & servicing

	CS - 30 (E)	CS - 30 (G)
Dimension (WxDxH)mm	474 x 463 x 400	474 x 502 x 400
Packed Size (WxDxH)mm	475 x 470 x 510	475 x 470 x 530
Estimate Weight (Kg)	8	12
Heater / Burner	3 KW	12,000
Rating	240V 50Hz 13A	Gas Operated
Temperature	30°C ~ 110°C	N/A



◆ ELECTRIC PAU STEAMER



MSM 2002 (D)

- ◆ Temperature from 30°C to 100°C
- ◆ Timer for initial heat up energy saving
- ◆ Buzzer alert system when water tank is running low
- ◆ Auto power cut off when water tank is empty
- ◆ Fully-adjustable thermostat for steaming temperature required
- ◆ Available in swing door or drawer version

MSM 2002 (D)	
Dimension (WxDxH)mm	520 x 538 x 900
Packed Size (WxDxH)mm	540 x 556 x 1000
Estimate Weight (Kg)	51.5
Heater (Watt)	1450
Rating	240V 50Hz 13A
Lamp (Watt)	32
Capacity	80 nos.

◆ GAS PAU STEAMER



MSM-2006 (G)

- ◆ Full view glass windows
- ◆ Floor standing with wheel

MSM-2006 (G)	
Dimension (WxDxH)mm	640 x 650 x 1570
Packed Size (WxDxH)mm	665 x 674 x 1600
Measurement	0.52 M ³
Estimate Weight (Kg)	62
Gas Consumption (mm BTU)	79,200
Electrical Volts	N/A
EGO Thermostat	N/A
Burners Type (LPG)	E 50
Capacity	120 nos.



COOKING EQUIPMENT

INSTANT WATER BOILER



- ◆ Boils high volume
- ◆ Built-in self refilling system
- ◆ Available in electric version

	MSMI / AB20E	MSMI / AB25E
Dimension (WxDxH)mm	558 x 670 x 1560	690 x 770 x 1685
Rating	240V 50Hz 15A (x2 power socket)	240V 50Hz 15A (x2 power socket)
EGO Thermostat	30°C - 110°C	30°C - 110°C
Heater	3kw	3kw
Capacity	75L	95L

APOLLO STOVE



- ◆ Available in gas or charcoal version

	MS/G (S)	MS/G (B)
Dimension (WxDxH)mm	Ø682 x 1411	Ø836 x 1469
Gas Consumption (mm BTU)	79,200	79,200
Gas Pressure	5 psi	5 psi
Burner Type (LPG)	E50	E50

	MS/C (S)	MS/C (B)
Dimension (WxDxH)mm	Ø682 x 1411	Ø836 x 1469
Gas Consumption (mm BTU)	-	-
Gas Pressure	-	-
Burner Type (LPG)	-	-

HIGH SPEED STEAMER



- ◆ Simple and easy to operate
- ◆ Direct water refill system

	HS - 1000
Dimension (WxDxH)mm	820 x 675 x 1610
Gas Consumption (mm BTU)	120,000
Burner Type (LPG)	6 nos burner



◆ FISH STEAMER



- ◆ Ample steaming size
- ◆ Direct water refill system
- ◆ Built-in with 5-tier steaming racks

MSMI / AS / 1022

Dimension (WxDxH)mm	717 x 717 x 1740
Gas Consumption (mm BTU)	120,000
Burner Type (LPG)	6 nos burner

◆ BOILING PAN



- ◆ Boils up to 30 gallons at one time
- ◆ Bottom valve to drain cooked liquid safely & easily

MSMI / 30B

Dimension (WxDxH)mm	835Ø x 890
Capacity	120 Liters (30 gallons)
Burners Type (LPG)	LPG P110 Burner
Gas Consumption (mm BTU)	65,000

◆ TILTING BRAISING PAN



- ◆ Excellent for high volume cooking
- ◆ Tilting feature to pour cooked item easily

MSMI / 200 / BSP

Dimension (WxDxH)mm	940 x 1060 x 925
Pan Dimension (mm Depth)	700 x 600 x 185
Capacity	60 liters
Gas Consumption (mm BTU)	52,000



COOKING EQUIPMENT

◆ TILTING KETTLE



- ◆ Boils up to 35 gallons at one time
- ◆ Tilting feature to pour cooked item easily from kettle

MSMI / 30T / K	
Dimension (WxDxH)mm	1372 x 1000 x 1020
Capacity	140 Liters (35 gallons)
Gas Consumption (mm BTU)	180,000

◆ KWALI COOKER



- ◆ LPG burner
- ◆ Cast iron kwali
- ◆ Made of food grade 304 stainless steel
- ◆ Available in 24"Ø, 36"Ø, 48"Ø

MSMI / 36 K	
Dimension (mm)	780Ø x 910
Gas Consumption (mm BTU)	65,000
Burners Type (LPG)	LPG P110 Burner

◆ COOKING MIXER



- ◆ Unit available in either full stainless steel structure or mild steel structure with stainless steel bowl
- ◆ With tilting system
- ◆ Option of either jacketed with thermal oil single layer bowl

	MP-30-T/SS	MP80-SL-T	MP80-JK-T	MP160-SL-T	MP160-JK-T	MP280-JK-T
Dimension (WxDxH)mm	590 x 690 x 820	1450 x 1050 x 2000	1450 x 1050 x 2000	1600 x 1430 x 2110	1600 x 1430 x 2110	1800 x 1600 x 2300
Bowl Size	520Ø x 430	790Ø x 300	790Ø x 300	1020Ø x 407	1020Ø x 407	1190Ø x 510
Bowl Specification	Single Layer	Single Layer	Jacketed	Single Layer	Jacketed	Jacketed
Capacity	30 Liters	80 Liters	80 Liters	160 Liters	160 Liters	280 Liters
Mixing Power	1HP / 3PH / 415V	1HP / 3PH / 415V	1HP / 3PH / 415V	2HP / 3PH / 415V	2HP / 3PH / 415V	5HP / 3PH / 415V
Speed	2 level	2 level	2 level	2 level	2 level	2 level
Accessories	Gas stove	Gas stove	Gas stove	Gas stove	Gas stove	Gas stove



GREASE TRAP



	GT - 25L	GT - 50L	GT - 80L
Dimension (WxDxH)mm	400 x 300 x 225	500 x 300 x 325	600 x 400 x 325
Capacity	25 liter	50 liter	80 liter

INSECT KILLER



TI-2020

TI-2020	
Dimension (WxDxH)mm	610 x 120 x 415
Packed Size (WxDxH)mm	658 x 158 x 466
Measurement	0.05m ³
Estimate Weight (Kg)	8.7
Rating	240V 50Hz 13A
EGO Thermostat	N/A
Heater	N/A
Action Range	12-15 metres
Output	4 vac
Material	CR (Epoxy)

INSECT TRAP



TI-1000



TI-1100



TI-1200



TI-1300

	TI-1000	TI-1100
Dimension (WxDxH)mm	795x185x265	615x145x240
Weight (Kg)	3.7	3.4
Rating	240V 50Hz 13A	240V 50Hz 13A
Electrical Consumption	40w	18w
Glue Sticker	10 pcs	10 pcs

	TI-1200	TI-1300
Dimension (WxDxH)mm	680x125x250	680x125x250
Weight (Kg)	3.9	4.0
Rating	240V 50Hz 13A	240V 50Hz 13A
Electrical Consumption	18w	18w
Glue Sticker	10 pcs	10 pcs


FOOD DISPLAY WARMER



OSL-450 (S)



OSL-450 (R)

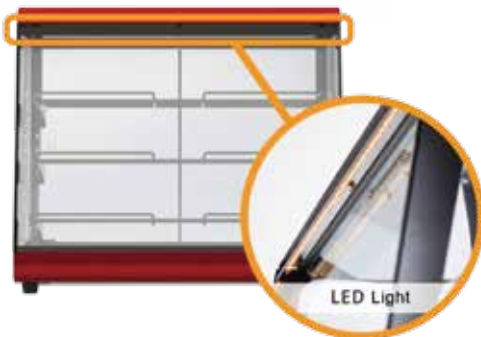

LED Light

2 LED light attracts the customers to the ever-delicious looking food.

OSL-450	
Supply Voltage	AC220-240V
Power Consumption	420W-500W
Temperature Control	40°C - 80°C (Thermostat setting 135°C)
Illumination Lamp	LED 24V 8.4W
Outer Dimensions (WxDxH)mm	453 x 400 x 535
Inner Dimensions (WxDxH)mm	440 x 360/260 x 413
Net Weight (Kg)	22
Accessories	Shelf rack x 3, Water tray x 1
Available Colours	● Red ● Yellow ● Black



1 Terraced shelf board height adjustment for sectional shelf capable of precisely adjusting the height of a shelf rack.



3 Easy control with upper switch and control knobs.


TAIJI

CUSTOMIZED EQUIPMENT



MSM has long been offering its services in areas of customization. The demands of commercial kitchens are never the same and that these requirements are unique to the food that it serves. In today's commercial building, the size and layout are never the same and the design of space and workflow is essential to a systematic and productive kitchen. Thus the requirement for customization is even more crucial.

- *"Made-to-fit" concept for different layouts & sizes**
- *To produce a systematic and productive kitchen**

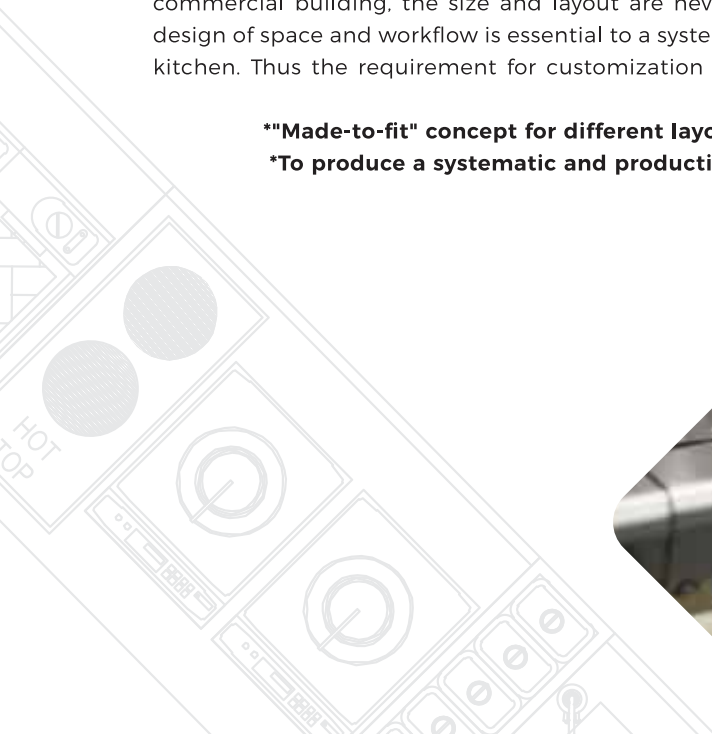



FLOOR STANDING **DEEP FRYER**

RDGF-300

Dim: 394 x 759 x 1195mm

Power: 90,000 BTU/Hr

Capacity: 18.5-23L

Net Weight: 49kg



Gas Type



Adjustable
60°C to 200°C



The SelfCookingCenter® ASEAN Edition.

The standard for Southeast Asian cuisine



SelfCookingCenter® Model XS



SelfCookingCenter® Model 101



SelfCookingCenter® Model 61



Steaming
between 30~130°C



Convection
between 30~300°C



Combination of steam & convection
between 30~300°C



Simplicity through cooking intelligence - **iCookingControl**



Top quality precision – **HiDensityControl®**



Clever mixed loads – **iLevelControl**



Intelligent automated cleaning – **Efficient CareControl**

Accessories



Grill and Pizza Tray



Cross and Stripe Grill Grate



Multibaker



Baking Tray Perforated



Roasting and Baking Tray

