



The SelfCookingCenter® ASEAN Edition.

The standard for Southeast Asian cuisine



SelfCookingCenter® Model XS



SelfCookingCenter® Model 101



SelfCookingCenter® Model 61



Steaming
between 30~130°C



Convection
between 30~300°C



Combination of
steam & convection
between 30~300°C



Simplicity through
cooking intelligence -
iCookingControl



Top quality precision -
HiDensityControl®



Clever mixed loads -
iLevelControl



Intelligent automated
cleaning -
Efficient CareControl

Accessories



Grill and Pizza Tray



Cross and Stripe Grill Grate



Multibaker



Baking Tray Perforated



Roasting and Baking Tray




FOOD DISPLAY WARMER



OSL-450 (S)



OSL-450 (R)

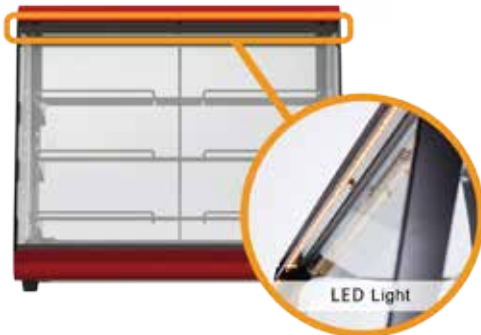

LED Light

2 LED light attracts the customers to the ever-delicious looking food.

OSL-450	
Supply Voltage	AC220-240V
Power Consumption	420W-500W
Temperature Control	40°C - 80°C (Thermostat setting 135°C)
Illumination Lamp	LED 24V 8.4W
Outer Dimensions (WxDxH)mm	453 x 400 x 535
Inner Dimensions (WxDxH)mm	440 x 360/260 x 413
Net Weight (Kg)	22
Accessories	Shelf rack x 3, Water tray x 1
Available Colours	● Red ● Yellow ● Black



1 Terraced shelf board height adjustment for sectional shelf capable of precisely adjusting the height of a shelf rack.



3 Easy control with upper switch and control knobs.

TAIJI

MODELUX
designed by Lassele **PLUS**

INTRODUCING NEW ICE MAKERS
FROM KOREA



Specifications & designs are subject to change without prior notice

Modular Ice Maker



Air Filter

Easily detachable and cleanable air filter extends product life and reduces maintenance cost.



PCB Display

Users can check every step and error code at a glance. Engineers can easily figure out the problem without visiting the site.



Stainless Steel Evaporator

Long lasting durable stainless steel evaporator produces firm and clear ice.



Firm Leg

Height adjustable and firm leg supports the product.



Front & Side Air Circulation

Side air circulation prevents heat from directly touching users.



Undercounter Ice Maker



MODULAR ICE MAKER



		MDIM-300A	MDIM-500A	MDIM-650A	MDIM-900A
Exterior Dimension (W x D x H)	mm	564 x 696 x 778	564 x 696 x 778	564 x 676 x 958	766 x 676 x 958
	inch	22.2 x 27.4 x 30.6	22.2 x 27.4 x 30.6	22 x 27 3/8 x 37 3/4	30 x 27 3/8 x 37 3/4
Packing Dimension (W x D x H)	mm	680 x 790 x 924	680 x 790 x 924	660 x 800 x 1140	860 x 800 x 1140
	inch	27 x 31 x 36	27 x 31 x 36	26 x 31 1/2 x 44 7/8	33 8/7 x 31 1/2 x 44 7/8
Net Weight	kg	60	62	73	81
	lb	133	138	161	178
Gross Weight	kg	75	78	90	97
	lb	167	173	198	213
Ice Production / day	kg	136	227	329kg* / 287kg**	389kg* / 325kg**
	lb	300	500	726lb* / 633lb**	858lb* / 717lb**
Ice Size	mm	38 x 28 x 13	38 x 28 x 13	38 x 28 x 13	38 x 28 x 13
	inch	1.5 x 1.1 x 0.5	1.5 x 1.1 x 0.5	3/2 " x 9/8 " x 1/2"	3/2 " x 9/8 " x 1/2"
Ice Shape		crescent	crescent	crescent	crescent
Condenser		air-cooled	air-cooled	air-cooled	air-cooled
Compressor (hp)		1/2	3/4	1	1.5
Refrigerant		R-404a	R-404a	R-410A	R-410A
Voltage / Frequency		220~240 V / 50 & 60Hz	220~240 V / 50 & 60Hz	220~240 V / 50 & 60Hz	220~240 V / 50 & 60Hz
Ampere		6.0A	7.0A	6.0 A	9.0 A
Electricity Consumption / Day		15.9 kWh	24.5 kWh	25.8 kWh	39.4 kWh
Certification		Safety - UL Sanitation - ETL CE	Safety - UL Sanitation - ETL CE	Safety - UL Sanitation - ETL Energy Star	Safety - UL Sanitation - ETL

STORAGE BIN



* 153 mm (6 inch leg included)

		MDIB-300S	MDIB-500S
Exterior Dimension (W x D x H)	mm	560 x 825 x 1174	762 x 825 x 1174
	inch	22 x 32.5 x 46.2	30 x 32.5 x 46.2
Packing Dimension (W x D x H)	mm	610 x 920 x 1155	860 x 920 x 1155
	inch	24 x 36.2 x 4.5	34 x 36.2 x 47.2
Net Weight	kg	34	42
	lb	75	93
Gross Weight	kg	47	69
	lb	103.5	152
Ice Storage	kg	118	167
	lb	260	370

*Ambient temperature 21°C(70°F) Water temperature 10°C(50°F)

**Ambient temperature 32°C(90°F) Water temperature 21°C(70°F) - Energy star standard

◆ UNDERCOUNTER ICE MAKER

* 153 mm (6 inch leg included)



MDIU-60A / MDIU-100A / MDIU-150A



MDIU-250A

		MDIU-60A	MDIU-100A	MDIU-150A	MDIU-250A
Exterior Dimension (W x D x H)	mm	500 x 600 x 810	500 x 600 x 810	635 x 708 x 975	773 x 763 x 978
	inch	19 11/16 x 23 5/8 x 31 7/8	19 11/16 x 23 5/8 x 31 7/8	25 x 27.9 x 38.3	30.4 x 30 x 38.5
Packing Dimension (W x D x H)	mm	560 x 690 x 972	560 x 690 x 972	720 x 790 x 995	880 x 830 x 995
	inch	22 x 27 3/16 x 38 1/4	22 x 27 3/16 x 38 1/4	28 x 31 x 39	35 x 33 x 39
Net Weight	kg	49	49	56	66
	lb	108	108	123	147
Gross Weight	kg	57.5	57.5	71	86
	lb	126	126	158	191
Ice Production / day	kg	41kg* / 30kg**	44kg* / 34kg**	68	113
	lb	91lb* / 67lb**	98lb* / 75lb**	150	250
Ice Storage	mm	25	25	30	42
	inch	55	55	66	96
Ice Size	mm	38 x 28 x13	38 x 28 x13	38 x 28 x13	38 x 28 x13
	inch	3/2 x 9/8 x 1/2	3/2 x 9/8 x 1/2	1.5 x 1.1 x 0.5	1.5 x 1.1 x 0.5
Ice Shape		crescent	crescent	crescent	crescent
Condenser		air-cooled	air-cooled	air-cooled	air-cooled
No. of Legs		4	4	4	4
Compressor (hp)		1/3	1/2	1/3	1/2
Refrigerant		R-134a	R-134a	R-134a	R-404a
Voltage / Frequency		220-240 V / 50 & 60Hz	220-240 V / 50 & 60Hz	220-240 V / 50 & 60Hz	220-240 V / 50 & 60Hz
Ampere		2.0 A	2.5 A	4.0A	5.0A
Electricity Consumption / Day		5.5 kWh	7.1 kWh	10.2 kWh	15.5 kWh
Certification		-	-	Safety - ETL Sanitation - ETL Energy Star CE (230 V / 50Hz)	Safety - UL Sanitation - ETL CE

*Ambient temperature 21°C(70°F) Water temperature 10°C(50°F)

**Ambient temperature 32°C(90°F) Water temperature 21°C(70°F) - Energy star standard